

# ATC

Making Your World ..  
a safer Place ..



# FIRE EXTINGUISHERS

# DRY POWDER


## PORTABLE TYPE FIRE EXTINGUISHERS



## 1KG ABC POWDER FIRE EXTINGUISHERS

Kitemark Certified

### CLASS OF FIRE

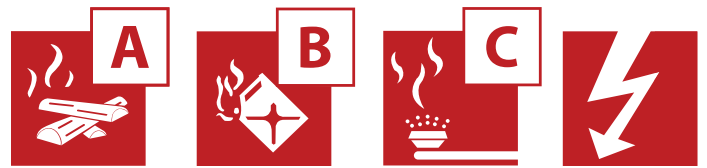

### Technical Data :

Model :	P1
Shell-Approx(mm):	85
Height-Approx(mm):	270
Capacity(L):	1.25
Extinguishing media:	30% ABC
Full weight(kg)	2.2
Discharge time-Approx(mm):	≥6s
Working pressure(bar):	14
Test pressure(bar):	27
Fire rating	8A 34B C

# DRY POWDER


## PORTABLE TYPE FIRE EXTINGUISHERS



## 2KG ABC POWDER FIRE EXTINGUISHERS

Kitemark Certified

### CLASS OF FIRE

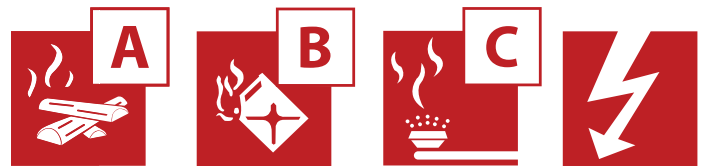

### Technical Data :


Model :	P2
Shell-Approx(mm):	110
Height-Approx(mm):	317
Capacity(L):	2.5
Extinguishing media:	30% ABC
Full weight(kg)	4
Discharge time-Approx(mm):	≥9s
Working pressure(bar):	14
Test pressure(bar):	27
Fire rating	13A 70B C

# DRY POWDER

## PORTABLE TYPE FIRE EXTINGUISHERS



### CLASS OF FIRE

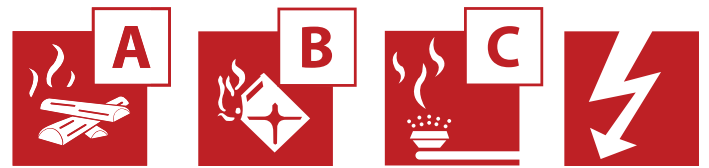

### Technical Data :

Model :	P6
Shell-Approx(mm):	150
Height-Approx(mm):	444
Capacity(L):	6.8
Extinguishing media:	30% ABC
Full weight(kg)	9.4
Discharge time-Approx(mm):	≥ 15 s
Working pressure(bar):	14
Test pressure(bar):	27
Fire rating	43A233B C

## 6KG ABC POWDER FIRE EXTINGUISHERS

Kitemark Certified






# DRY POWDER

## PORTABLE TYPE FIRE EXTINGUISHERS



## 10KG ABC POWDER FIRE EXTINGUISHERS

### CLASS OF FIRE

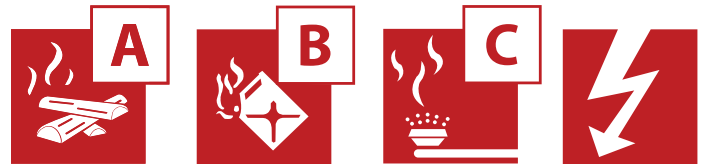

### Technical Data :

Agent :	10kg ABC chemical Powder (40%MAP)
Fire rating:	43A/233B/C
Material:	ST12/ST14
Cylinder size(ØDxH):	Ø 182mm x 520mm
Discharge Range:	6~8m
Extinguisher weight:	13.1kg
Volume (L):	11.3L
Discharge time:	>17`S
Working Pressure:	14Bar at 20°C
Test pressure	30Bar
Finishing:	Powder Coating UV Resistance
Packing Size (LxWxH)	195mm x 195mm x 600mm
Qty/20GP	1227pcs
Valve:	M30x1.5 Pressure Valve CE Approval


# DRY POWDER

## TROLLEY TYPE FIRE EXTINGUISHERS



## 25KG ABC POWDER TROLLEY EXTINGUISHERS

### CLASS OF FIRE

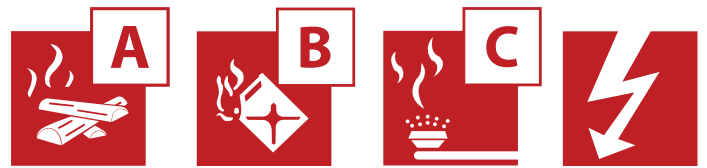

### Technical Data :

Agent :	25kg ABC Chemical Powder (40%)
Working pressure:	14BAR
Test pressure:	30BAR
Out-diameter:	Ø256mm
Volume:	31L
Fire rating:	55A I BC
Operating temperature:	-30°C ~+60°C
Wall-thickness:	2.5mm
Cylinder Length:	595mm
Extinguisher weight	37.5kg


# DRY POWDER

## TROLLEY TYPE FIRE EXTINGUISHERS



## 50KG ABC POWDER TROLLEY EXTINGUISHERS

### CLASS OF FIRE

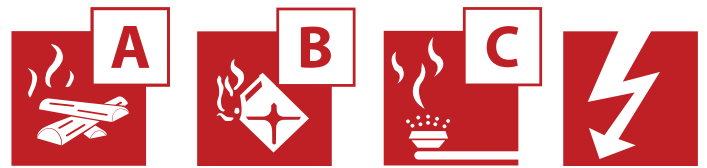

### Technical Data :

Agent :	50kg ABC Chemical Powder (40%)
Working pressure:	14BAR
Test pressure:	30BAR
Out-diameter:	Ø305mm
Volume:	59.5L
Fire rating:	55A II BC
Operating temperature:	-30°C ~+60°C
Wall-thickness:	2.5mm
Cylinder Length:	930mm
Extinguisher weight	77kg


# DRY POWDER

## TROLLEY TYPE FIRE EXTINGUISHERS



## 100KG ABC POWDER TROLLEY EXTINGUISHERS

### CLASS OF FIRE

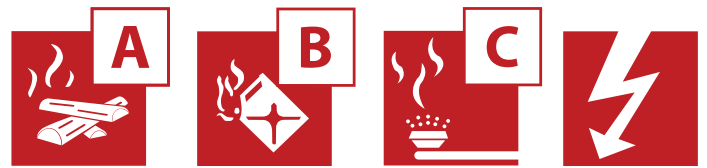

### Technical Data :

Agent :	100kg ABC Chemical Powder (40%)
Working pressure:	14BAR
Test pressure:	30BAR
Out-diameter:	Ø406mm
Volume:	121.5L
Fire rating:	57A III BC
Operating temperature:	-30°C ~+60°C
Wall-thickness:	2.8mm
Cylinder Length:	1050mm
Extinguisher weight	145kg




# DRY POWDER

## AUTOMATIC TYPE FIRE EXTINGUISHERS



### CLASS OF FIRE

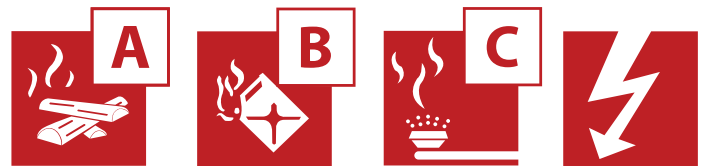

### Technical Data :

Agent :	6kg ABC Chemical Powder (40%)
Working pressure:	12BAR
Test pressure:	25BAR
Material:	ST12/ST14
Volume:	7.6L
Fire rating:	21A/144B/c
Protection area:	$R \geq 0.94$
Starting temperature:	$\leq 60^{\circ}\text{C}$
Cylinder size( $\varnothing$ DxH):	$\varnothing 300\text{mm} \times 185\text{mm}$
Extinguisher weight	10kg

## 6KG ABC POWDER AUTOMATIC EXTINGUISHERS

# FOAM PORTABLE TYPE FIRE EXTINGUISHERS



## 6LTR AFFF FOAM FIRE EXTINGUISHERS

Kitemark Certified

### CLASS OF FIRE



### Technical Data :

Model :	F6
Shell-Approx(mm):	162
Height-Approx(mm):	448
Capacity(L):	7.5
Extinguishing media:	3%AFFF+WATER
Full weight(kg)	10.3
Discharge time-Approx(mm):	≥15s
Working pressure(bar):	12
Test pressure(bar):	27
Fire rating	21A 144B 75F

# FOAM PORTABLE TYPE FIRE EXTINGUISHERS



## 9LTR AFFF FOAM FIRE EXTINGUISHERS

Kitemark Certified

### CLASS OF FIRE



### Technical Data :

Model :	F9
Shell-Approx(mm):	184
Height-Approx(mm):	519
Capacity(L):	12
Extinguishing media:	3%AFFF+WATER
Full weight(kg)	14.5
Discharge time-Approx(mm):	≥15s
Working pressure(bar):	12
Test pressure(bar):	27
Fire rating	21A 183B 75F

# WATER PORTABLE TYPE FIRE EXTINGUISHERS



## CLASS OF FIRE



## Technical Data :

Model :	W6
Shell-Approx(mm):	162
Height-Approx(mm):	448
Capacity(L):	7.5
Extinguishing media:	WATER
Full weight(kg)	10.3
Discharge time-Approx(mm):	≥15s
Working pressure(bar):	12
Test pressure(bar):	27
Fire rating	13A

**6LTR WATER  
FIRE EXTINGUISHERS**

**Kitemark Certified**



# CO2


## PORTABLE TYPE FIRE EXTINGUISHERS



## 2KG ALLOY STEEL CO2 FIRE EXTINGUISHERS

Kitemark Certified

### CLASS OF FIRE

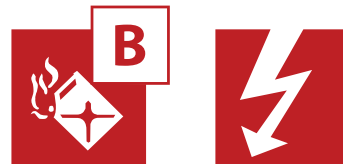

### Technical Data :

Model :	K2
Shell-Approx(mm):	104
Height-Approx(mm):	480
Capacity(L):	3
Extinguishing media:	CO2
Full weight(kg)	6.5
Discharge time-Approx(mm):	≥6s
Working pressure(bar):	174
Test pressure(bar):	250
Fire rating	34B


# CO2

## PORTABLE TYPE FIRE EXTINGUISHERS



## 6KG ALLOY STEEL CO2 FIRE EXTINGUISHERS

### CLASS OF FIRE

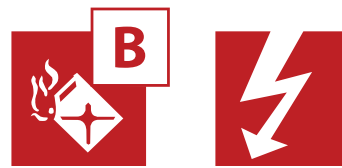

### Technical Data :

Agent :	6kg Carbon Dioxide Gas
Fire rating:	89B
Material:	Alloy Steel
Cylinder Size (OD x H):	130 x 765mm
Cylinder Weight:	9.5kg
Extinguisher weight:	15.9kg
Volume (L):	9.0±0.9
Min. Thickness:	2.6mm
Working Pressure:	170~174Bar
Test pressure	255Bar
Operating temperature:	-30°C ~+60°C
Packing Size (LxWxH)	190mm x 150mm x 890mm
Qty/20GP	1180pcs


# CO2

## TROLLEY TYPE FIRE EXTINGUISHERS



## 10KG CO2 TROLLEY EXTINGUISHERS

### CLASS OF FIRE

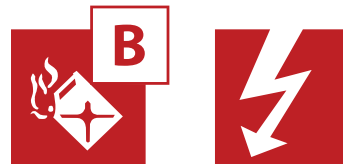

### Technical Data :

Agent :	10kg Carbon Dioxide Gas
Fire rating:	183B
Material:	CK45
Cylinder Length:	1035mm
Cylinder Weight:	20kg
Extinguisher weight:	36kg
Volume (L):	15L
Wall- Thickness:	5.0mm
Working Pressure:	174Bar
Test pressure	250Bar
Operating temperature:	-30°C ~+60°C
Packing Size (LxWxH)	460mm x 300mm x 1200mm
Out-diameter	Ø152mm
Filling Weight:	20kg

# ABU AMER

## Safety & Security Services

**BRISTOL**  
Fire Engineering

**Honeywell**

**AFCO**  
HEAVY EQUIPMENTS

**Fike**

**Secutron**  
AUTHORIZED DISTRIBUTOR



**WIRTGEN**



**VÖGELE**



**KLEEMANN**



**HAMM**



**BENNINGHOVEN**



Sana'a Yemen Main Office



+967 1 275 251 (المكتب الرئيسي)

+967 1 498 780 (معرض المبيعات)



+967 779 999 020 (التسويق والترويج)

+967 776 213 455 (ورشة الصيانة)



info@abuamergroup.net



www.abuamergroup.net